

InvisiLight® Cord

for InvisiLight MDU Solution (Indoor Only) and InvisiLight Facade Solution (Indoor/Outdoor)

InvisiLight MDU Cord (Indoor Only)



Features and Benefits

- Virtually invisible
- Preferred by building owners and tenants vs. molding or conduits
- Faster and easier to install
- From the riser to each door with a point of entry module
- Lower installed cost per door passed vs. molding or conduit systems or cut and patch
- EZ-Bend® Optical Fiber navigates tight corners down to 2.5 mm

InvisiLight MDU Cord Specifications



	Indoor Only	
Fiber Count	4, 6, 8, 12	16
Cable Outer Diameter - mm (in.)	2.0 (0.08)	2.3 (0.09)
Weight - kg/km (lb/kft)	3.6 (2.4) - 4.9 (3.3)	5.14 (3.45)
Flame Rating (North America)	OFNR/FT-4	OFNR/FT-4
CPR Rating (Europe)	Cca-s2, d0, a3	Cca-s2, d0, a3

DoP Lookup:

www.ofsop-sales.com/cpr

MPHW-XXX-M-R
(XXX = Fiber Count)

** Additional specification information is available for MDU Indoor Cord at:
<https://fiber-optic-catalog.ofsoptics.com/documents/pdf/M-Pack-Interconnect-Cordage-229-web.pdf>

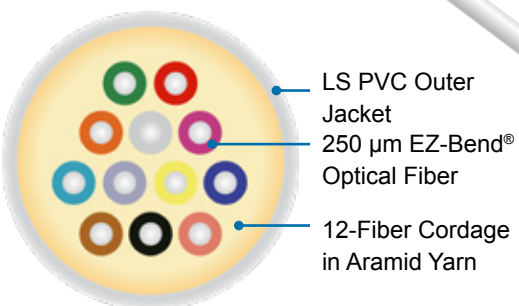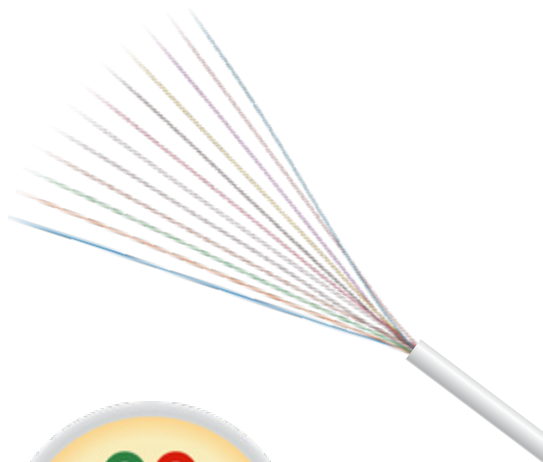


12-Fiber Version Shown




A Furukawa Company

InvisiLight® Cord for InvisiLight MDU (Indoor Only) and Facade Solution (Indoor/Outdoor)


InvisiLight Facade (Indoor/Outdoor) Cord

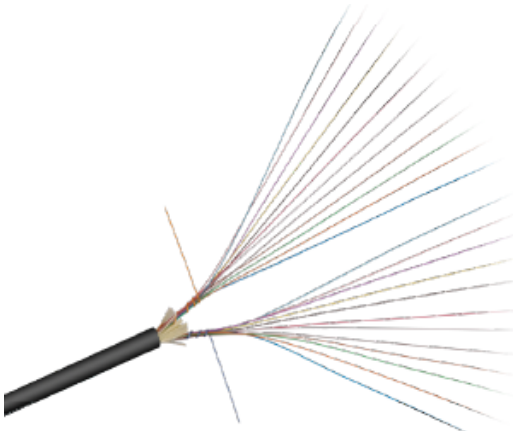

M-Pack Indoor/Outdoor MDU Drop Cable
(Available in white or black outer jacket)

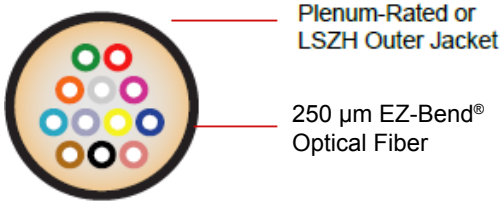

12-Fiber Cable

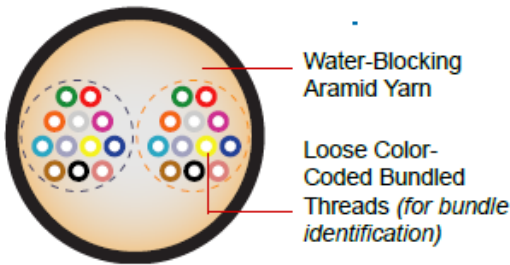

24-Fiber Cable

InvisiLight Facade Cord Specifications

	Indoor/Outdoor	
Fiber Count	12	24
Cable Outer Diameter - mm (in.)	3.0 (0.12)	3.8 (0.15)
Maximum Tensile - N (lb)	222 (50)	222 (50)
Weight - kg/km (lb/kft)	9.2 (6.2)	13.7 (9.2)
Flame Rating (North America)	OFNR/FT-6 (Plenum Version)	OFNR/FT-6 (Plenum Version)
CPR Rating (Europe)	Cca-s1a, d0, a1 (LSZH Version)	B2ca-s1a, d0, a1 (LSZH Version)
DoP Lookup: www.ofsop-sales.com/cpr	MO30-012-B-H	MO38-024-D-H

** Additional specification information is available for Indoor/Outdoor:
<https://fiber-optic-catalog.ofsoptics.com/documents/pdf/M-Pack-Indoor-Outdoor-MDU-Drop-Cable-prem-235-web.pdf>



For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2022 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
DOC ID: fap-415 Date: 11/22

For a full list of our certifications, visit our website.



InvisiLight and EZ-Bend are registered trademarks of OFS Fitel, LLC.
OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.