


TeraWave® SCUBA 125 Ocean Optical Fiber

For Submarine Systems Transmitting at 100 Gb/s and Beyond

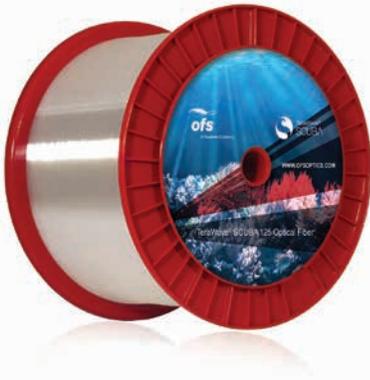

Applications

- Ultra-long haul networks using advanced modulation formats and coherent detection such as transoceanic networks
- Applications without repeaters, such as coastal festoons and deep-water crossings
- POP-to-landing-site connections for submarine cables

Engineered Fiber Sets

OFS has the capability to color and splice ocean fibers to meet stringent cable requirements. Fibers are selected to meet customer specifications for numbers of fibers, colors, lengths, and transmission properties. They are then assembled into sets. Final measurements guarantee customer specified performance for all fibers in the set.

Features and Benefits

- Effective area of 125 μm^2
- Enables launch of higher signal power than all G.652 and most G.654.B fibers
- Enable higher transmission speeds with more wavelengths over trans-oceanic distances
- Supports polarization-multiplexed, coherent transport using high spectral efficiency modulation formats
- Proof tested to 200 kpsi to help ensure long-term reliability under extreme conditions
- Available with average loss of 0.146 dB/km at 1550 nm

Overview

TeraWave® SCUBA 125 Ocean Optical Fiber is optimally designed to deliver excellent performance for coherent transport in submarine systems. A combination of ultra-low loss and higher nonlinear performance recommended for the highest spectral efficiency TeraWave SCUBA 125 Ocean Fiber is fully compliant with the ITU G.654.B and ITU G.654.D standard for cutoff-shifted fiber and provides outstanding cable performance and design freedom for ocean networks.

Product Description

A breakthrough in ocean fiber technology, TeraWave SCUBA Fibers offers a combination of large effective area, excellent cabling performance in the C- and L-bands, and world-class attenuation. These features enable reliable coherent transmission at 100 Gb/s and beyond over trans-oceanic distances at the highest channel counts. The fiber has a large effective area (125 μm^2) that reduces nonlinearities, enabling the launch of higher signal power into the span, and ultra-low attenuation that reduces signal loss.

The Silica Core and Ultra Big Area features of the TeraWave SCUBA fiber deliver significant margin beyond that needed for transmitting 100 Gb/s over trans-Atlantic distances. The additional margin can be used to upgrade to denser signal constellations for increased spectral efficiency as new transponders become commercially available.

TeraWave SCUBA Fiber is manufactured using OFS' proprietary manufacturing process, which produces ultra-low polarization mode dispersion (PMD) and exceptional resistance to mechanical stress.



A Furukawa Company

TeraWave® SCUBA 125 Ocean Optical Fiber

Product Specifications of TeraWave® SCUBA 125 Optical Fiber	
Transmission Characteristics	
Attenuation @ 1550 nm (nominal)	≤ 0.149 dB/km (standard) ≤ 0.146 dB/km (enhanced)
Dispersion @ 1550 nm	≤ 22 ps/nm-km
Mode Field Diameter @ 1550 nm (nominal)	12.3 μm
Effective Area (nominal)	125 μm ²
Cable Cutoff Wavelength	≤ 1530 nm
PMD @ 1550 nm (typical)	≤ 0.02 ps/√km
Effective Group Index of Refraction (nominal)	1.465 @ 1550 nm
Point Discontinuities @ 1550 nm	≤ 0.10 dB
Geometrical Characteristics	
Clad Diameter	125.0 ± 0.7 μm
Coating Diameter, uncolored	240 - 250 μm
Coating/Clad Concentricity Error	≤ 12 μm
Mechanical and Other	
Tensile Proof Test	200 kpsi (1.38 GPa)
Dynamic Fatigue Parameter (n _d)	≥ 20
Coating Strip Force (Mechanical)	1.0 - 8.9 N
Colors	24 colors available
Matching Sets	Yes

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2022 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
Doc ID: fiber-170 Date: 03/22

For a full list of our certifications, visit our website.



TeraWave is a registered trademark of OFS Fitel, LLC.

OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.